



# TECHNICAL DATA SHEET 24" x 40"

(609.60 mm x 1016.00 mm)

# PRESSWOOD PALLET

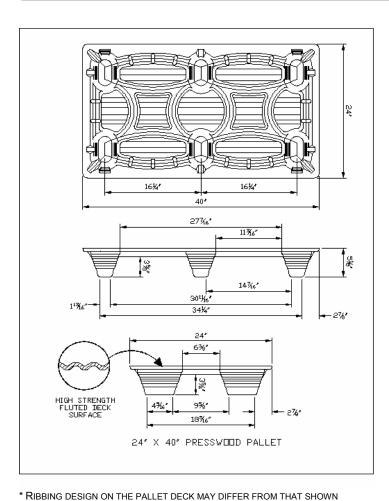



Manufactured according to the werzalit. process.

## **Manufacturing & Composition**

Inca Pallets are molded in one solid piece from dried wood fibers and environmentally safe synthetic resin in a compression mold under high pressure and temperature.

#### Low Moisture Content

Only 6 - 8% moisture content, no moisture transmission to product or packaging load on the pallet.

#### **Approximate Surface Area**

Top Deck: 477.00 sq. inches = 49.7% Deck Coverage

Footprint: 40.80 sq. inches

### Approximate Dynamic Load Capacity\*

WEIGHT CAPACITY COLOR CODE PAINTED STRIPE

Medium 1500 lbs. Green

\*Load uniformly distributed on pallet deck. Actual load capacity is application specific & dependant upon the product, packaging, load containment & handling environment. The testing of Inca pallets with the intended application is strongly recommended.

### 4 Way Entry

4-way entry with lift truck. 4-way entry with pallet jack.

#### Nestability

A stack of 50 Inca Pallets nest approximately 7' high. For each additional pallet, add 2" to height of stack.

#### **Rounded Corners & Tapered Legs**

Pallets have all rounded corners and tapered legs which make them ideal for stretch or shrink wrapping.

#### **Design for Safety**

Because Inca Pallets weigh up to 50% less than conventional hardwood pallets, they are safer and easier to handle. And, there are no nails or splinters to damage product or injure personnel.

#### **Full Truckload Capacity**

Quantities vary with pallet size and weight per truckload, typically: WEIGHT TRUCKLOAD LBS./PALLET Medium 2,000 21 (+/- 1.5)

#### **Export Approved!**

Save money, time & costly delays. Inca presswood pallets are welcome worldwide. They are considered "processed wood" per ISPM 15 export wooden packaging regulations. No extra, costly treatment against infestation is required!

